

BeanDevice® 2.4GHz ONE-TIR-MED

Wireless IIOT Sensor | IR(Infrared) temperature sensor | Medical Precision | built-in datalogger



MADE IN GERMANY



APPLICATION VIDEO



USER GUIDE



QUICK START



MECHANICAL DRAWING



STEP FILE



MAIN FEATURES



• Embedded data logger : up to 1 million data points



• Waterproof IP67 polycarbonate enclosure
Weight : 120g / Size (LxLxh) : 119x35x35mm



• Ultra-low power technology IEEE 802.15.4 (up to 7-year battery life) Max wireless range: 300m (L.O.S.)



• Primary cell capacity: 2200 mAh (AA size) Lithium-thionyl chloride technology



• High precision non-contact temperature measurement ($\pm 0,2^{\circ}\text{C}$)




• OPC server allowing real time access from your IT system to the BeanScope® (available on BeanScope® Premium+)

APPLICATIONS

AUTOMATIC AND NON-CONTACT FOREHEAD TEMPERATURE MEASUREMENT



MEDICAL MONITORING

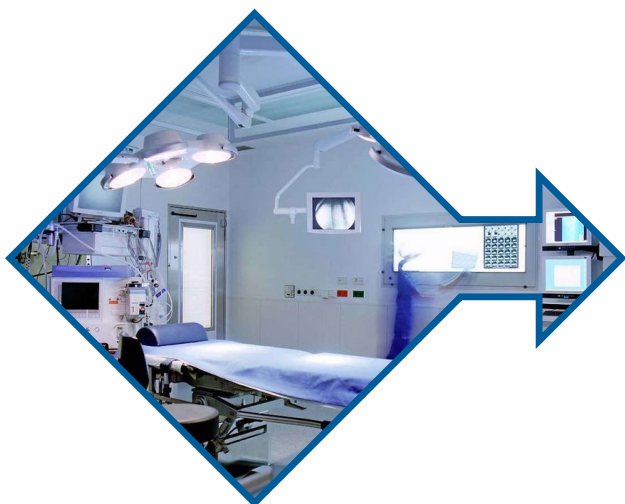



LABORATORY MONITORING



ADVANTAGES

- Rapid Analysis of the target system
- Highly operational in system with very high temperature
- Adapted for working in Hazardous /Sensible environment
- No risk of contamination and mechanical effect on the target
- High measurement accuracy
- Easy integration


IR TEMPERATURE SENSOR PRECISION

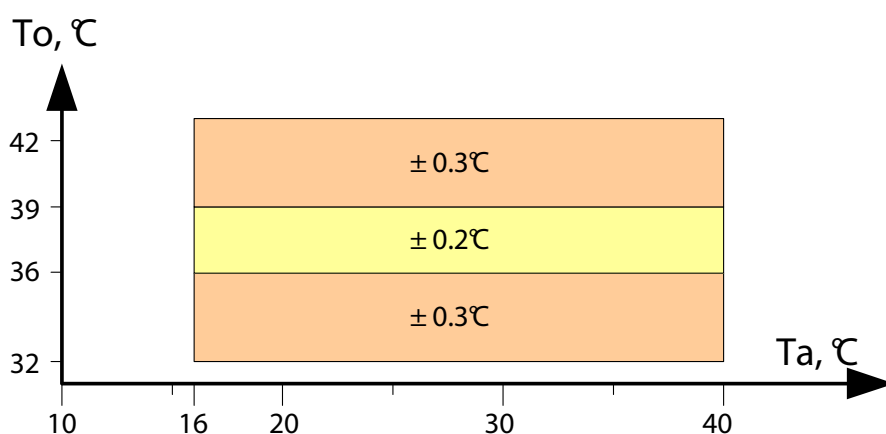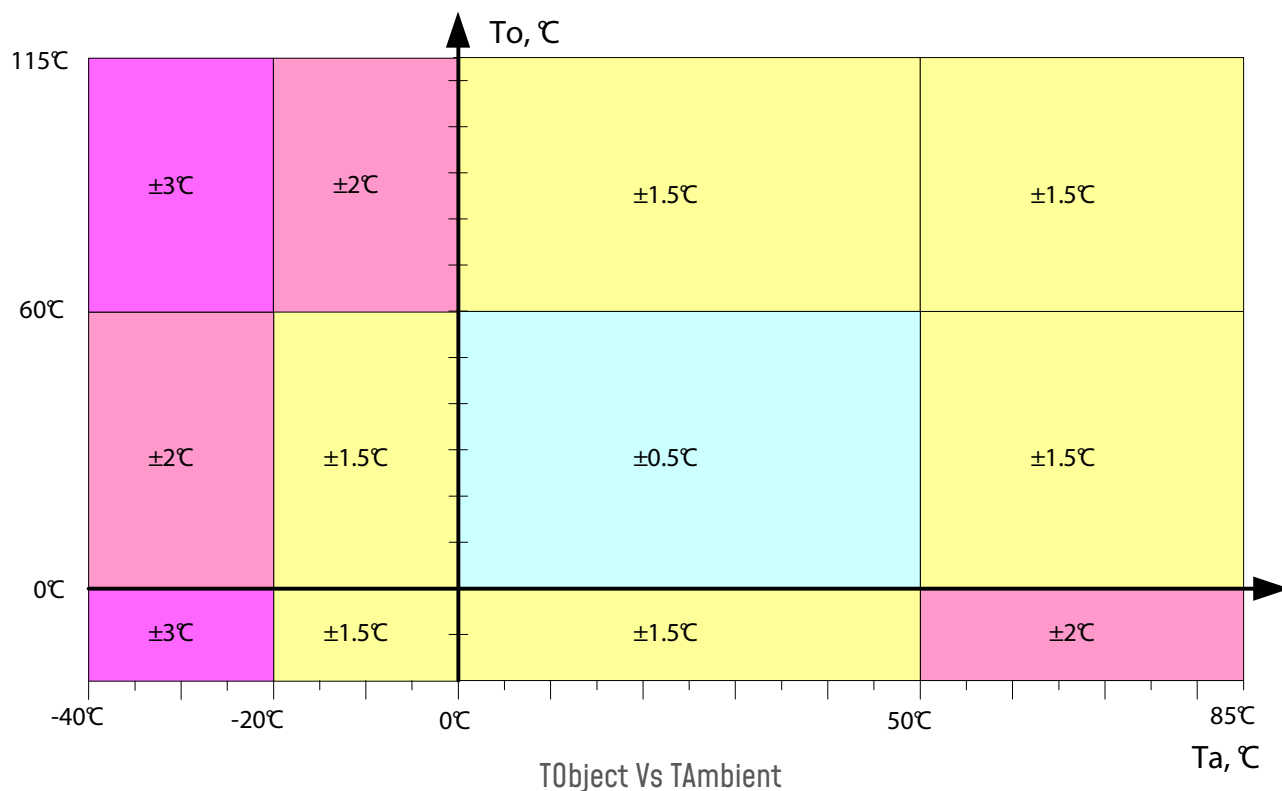

Accuracy of IR Temperature Sensor in range $T_{Ambient} = 16^\circ\text{C}$ to 40°C , $T_{Object} = 32^\circ\text{C}$... 42°C . comply with ASTM standard section 5.3 [Designation: E1965 – 98 (2009) – Standard Specification for Infrared Thermometers for Intermittent Determination of Patient Temperature].

TYPICAL FIELD OF VIEW

FOV

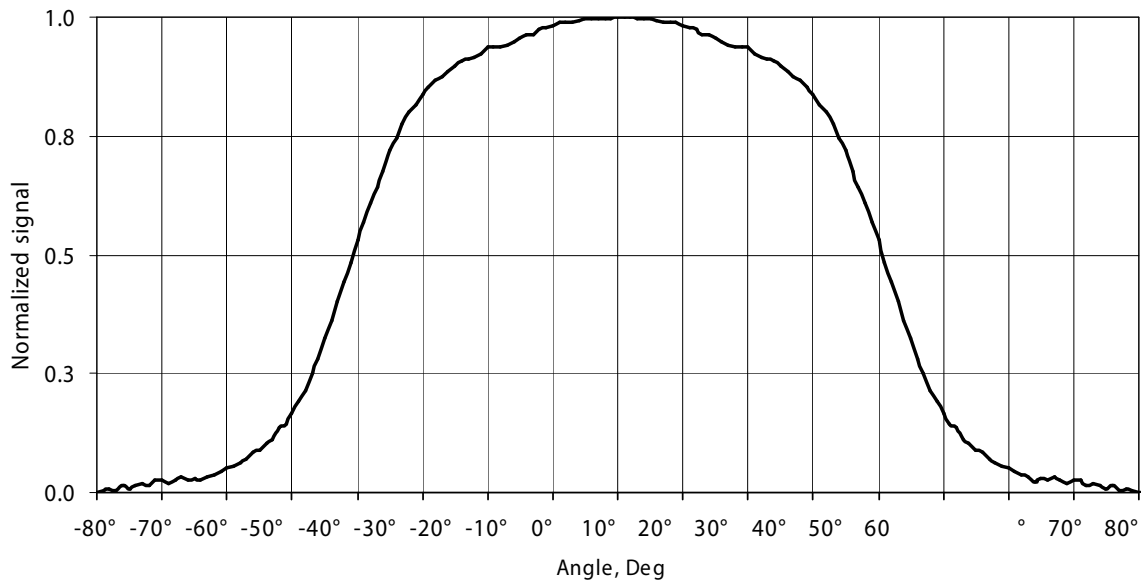

EMBEDDED DATA LOGGER UP TO 1 MILLION DATA POINTS

The [BeanDevice® 2.4GHz ONE-TIR-MED](#) integrates an embedded datalogger, which can be used to log data when a Wireless IIOT Sensors can not be easily deployed on your site. All the data acquisition are stored on the embedded flash and then transmitted to the [BeanGateway® 2.4GHz](#) when a network is established.

The dataLogger function is compatible with all the data acquisition mode available on your [BeanDevice® 2.4GHz ONE-TIR-MED](#):

- [LowDutyCycle Data Acquisition](#)
- [Survey](#)



For further information about data logger, please read the following technical note :
[TN-RF-007 – “BeanDevice® DataLogger User Guide ”](#)

REMOTE CONFIGURATION & MONITORING

BeanScape® 2.4GHz Basic

The **BeanScape® 2.4GHz** application allows the user to view all the data transmitted by the **BeanDevice® 2.4GHz ONE-TIR-MED**. With the OTAC (Over-the-Air configuration) feature, the user can remotely configure the **BeanDevice® 2.4GHz ONE-TIR-MED**

- **Low Duty Cycle Data Acquisition mode (LDCDA)** : the data acquisition is immediately transmitted by radio. The transmission frequency can be configured from 1s to 24h.
- **Survey Mode** : the measured value is transmitted by radio whenever an alarm threshold (fixed by the user) is detected (4 alarms threshold levels High/Low). Meanwhile, the device sends frequently a beacon frame informing its current status.

BeanScape® 2.4GHz Premium+ Add-on

The **BeanScape® 2.4GHz Premium+** integrates an OPC DA server (Data Access). OPC DA is particularly well suited for real time measurement and data sharing. Each data/measurement can be associated to a tag or its attributes and shared with one or many OPC clients



For further information about data logger, please read the following technical note :
[TN-RF-008 – “Data acquisition modes available on the BeanDevice®”](#)

TECHNICAL SPECIFICATIONS

PRODUCT REFERENCE

BND-2.4GHZ-ONE-Tir-MED

IR TEMPERATURE SENSOR SPECIFICATION

Measurement range	-40°C to +85°C for ambient temperature (Ta) -70°C to +115°C for object temperature (To)
Sensor Technology	Thermopile
Emissivity coefficient	0 to 1 (Configurable from the BeanScape®)
Accuracy	<ul style="list-style-type: none"> • $\pm 0.3^{\circ}\text{C}$ for body temperature 32°C to 36°C, Ambient Temperature 16°C to 40°C • $\pm 0.2^{\circ}\text{C}$ for body temperature 36°C to 39°C, Ambient Temperature 16°C to 40°C • $\pm 0.3^{\circ}\text{C}$ for body temperature 39°C to 42°C, Ambient Temperature 16°C to 40°C • Comply with ASTM standard Section 5.3 (Designation E1965 - 98(2009) - Standard Specification for Infrared Thermometers for Intermittent Determination of Patient Temperature)
Measurement resolution	0.02 °C
Field of View (FOV)	80°

RF SPECIFICATIONS

Wireless Technology	Ultra-Power and license-free 2.4Ghz radio technology (IEEE 802.15.4E)
WSN Topology	Point-to-Point / Star
Data rate	250 Kbits/s
RF Characteristics	ISM 2.4GHz – 16 Channels
TX Power	+18 dBm
Receiver Sensitivity	-95.5 dBm to -104 dBm
Max. Radio Range	300 m (Line of Sight) , 30-80m (Non Line of Sight)
Antenna	Omnidirectional antenna 2.2dBi

TECHNICAL SPECIFICATIONS

OVER-THE-AIR CONFIGURATION (OTAC) PARAMETERS

Data Acquisition mode	<ul style="list-style-type: none"> • Low Duty Cycle Data Acquisition (LDCDA) Mode: 1s to 24 hour • Alarm mode: 1s to 24 hour
Emissivity coefficient	0 to 1
Alarm Threshold	2 high level alarms & 2 low level alarms
Power Mode	Sleeping with Network Listening & Active

EMBEDDED DATA LOGGER

Storage capacity	up to 1 000 000 data points
Wireless data downloading	3 minutes to download the full memory (average time)

ENVIRONMENTAL AND MECHANICAL

Casing	<ul style="list-style-type: none"> • Polycarbonate, Waterproof IP67 – Fire Protection : ULV94 • Casing dimensions (Lxlxh) : 119 mm x 35 mm x 35 mm • Weight (battery included): 120g
Operating Temperature	-40°C to +75°C
Norms	FCC & CE compliant ROHS - Directive 2002/95/EC

POWER SUPPLY

Current consumption @3.3 Volts	<ul style="list-style-type: none"> • During data acquisition : 20 to 30 mA • During Radio transmission : 60 mA • During sleeping : < 10 µA
Included primary cell	Lithium-thionyl chloride battery with 1800 mAh capacity (AA size)

CHOOSE AN ULTRA LOW POWER WIRELESS SENSOR

RF transmission in minutes	Battery life (temperature room 25°C)
Every 2 minutes	22 months
Every 5 minutes	51 months
Every 10 minutes	102 months

BeanDevice® 2.4GHz ONE-TIR-MED

GETTING STARTED WITH A WIRELESS IIOT SENSORS

The BeanDevice® 2.4GHz ONE-TIR-MED operates only on our Wireless IIOT Sensors , you will need the BeanGateway® 2.4GHz and the BeanScape® 2.4GHz for starting a Wireless IIOT Sensors.



2.4GHz One-Tir-MED



Indoor Version



OR



Wireless IIOT Sensors
Supervision Software



Outdoor Version



Rethinking Sensing Technology

BEANDEVICE® ONE-TIR OVERVIEW

Waterproof Antenna



2.4GHz ONE-TIR-MED



ON/OFF non-contact
push button

Network Reset
non-contact push button

Eyelet for
wall mounting

Temperature Sensor probe

ACCESSORIES

Antenna

2.2 dBi omnidirectional antenna



Primary Cell

Lithium-thionyl chloride primary cell (Li-SOCl₂) 2,2 Ah
Ref: PP2.2DMG

Product specifications are subject to change without notice.
Contact Beanair for latest specifications

CONTACT US

Headquarter:

BeanAir GmbH
Wolfener Straße 32 - 34
12681 Berlin

Email:

info@beanair.com

Phone number:

+49 30 98366680



www.industrial-wsn.com




www.beanair.com



www.youtube.com/user/BeanairSensors



www.facebook.com/BeanAir

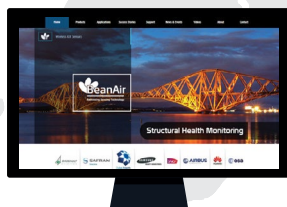

www.twitter.com/beanair

